




# ULTRASEAL LITE

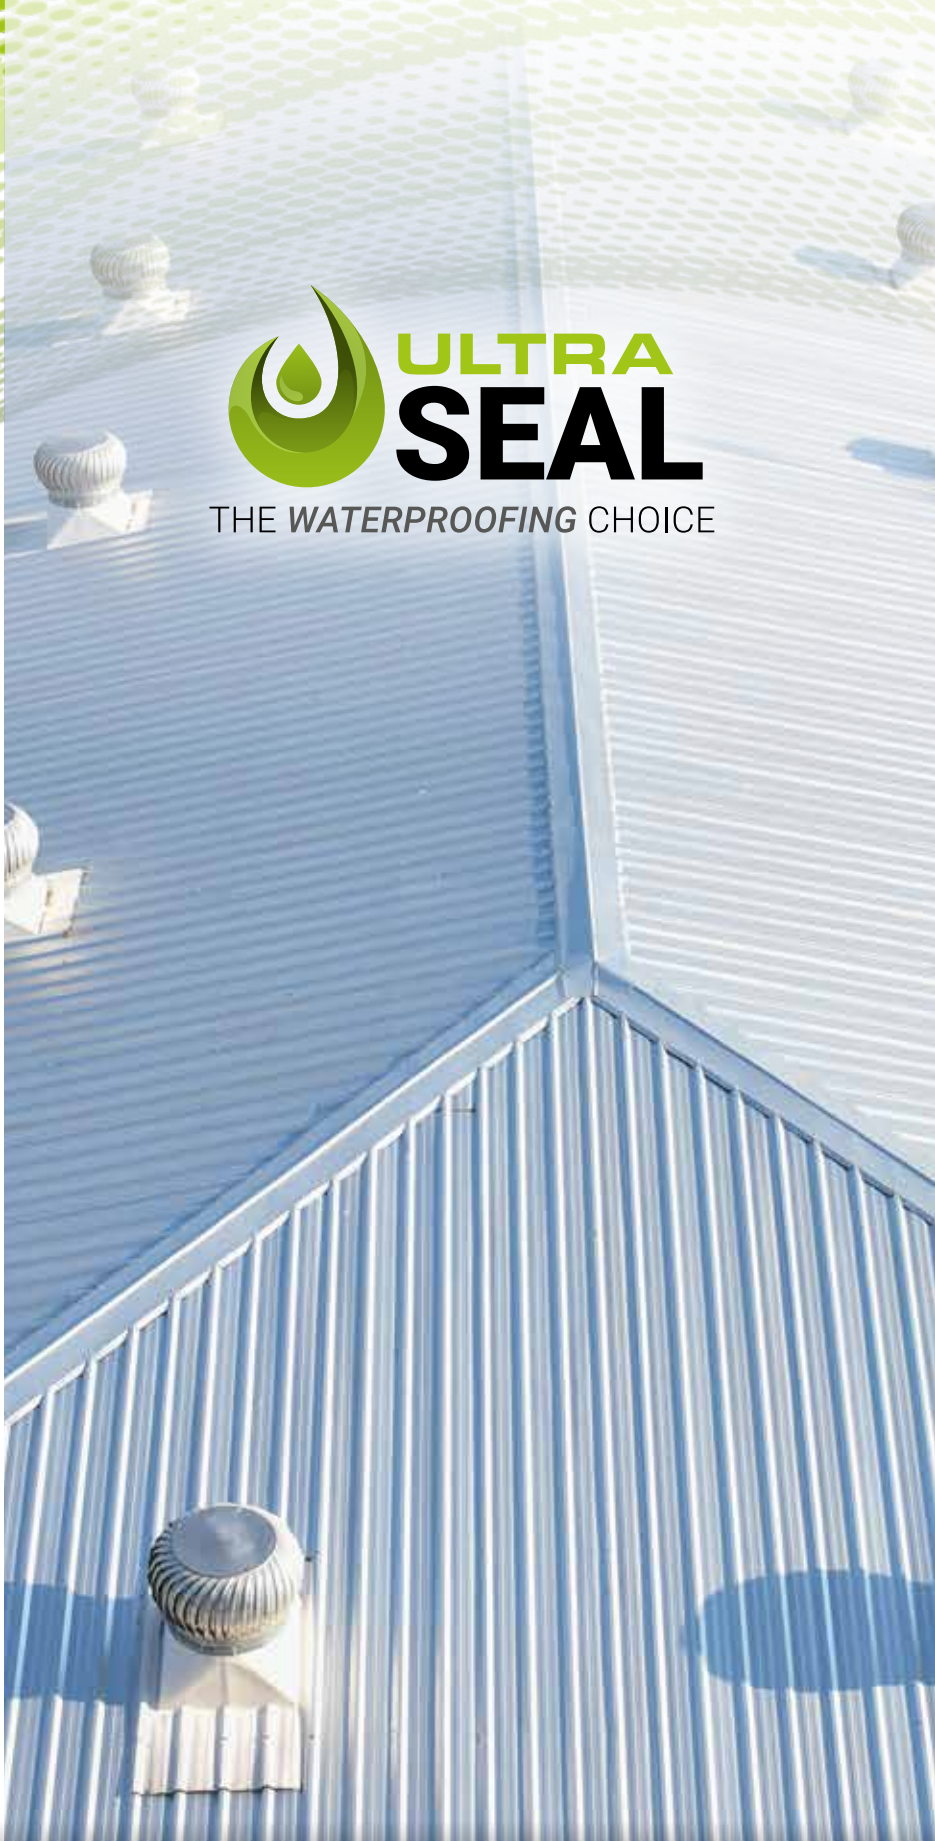

**ULTRA  
SEAL**

THE WATERPROOFING CHOICE



Weather  
Resistant



Durable &  
Flexible



UV  
Stable

UltraSeal Lite is prescribed for the waterproofing of areas where run-off is expected

*Manufactured by NUI – Member of the RIGIFoam Group*

# ULTRASEAL LITE



**UltraSeal Lite** is prescribed for the waterproofing of concrete roofs, pitched metal roofs and other waterproofing applications where run-off is expected. It is not recommended for permanent immersion e.g.: pond linings.

Where there are joins, roof screws or sharp edges, UltraSeal Lite should be used with reinforcing fabric between the first and second coats.

**UltraSeal Lite is eco-friendly by virtue of the following:**

- It is water-based.
- No reactive ingredients - curing by evaporation and coalescence only.
- No VOC's.

## APPLICATION


- Coatings can be applied by means of brush, roller or spray (single component airless or conventional spray equipment).
- UltraSeal Lite should be well mixed before use. Apply the first coat at a rate of 0.5 m<sup>2</sup>/litre and allow to dry. Apply the second coat after 24 hours.

## FILM DRYING TIME

The rate of cure is dependent on material and substrate temperature and relative humidity. High temperatures and humidity will accelerate the cure. Thicker films will take longer to cure.

Do not apply UltraSeal Lite under rainy conditions. UltraSeal Lite should be resistant to light rainfall after 6 hours, depending on ambient conditions.

## COLOURS



±6 HRS



WEATHERABLE

±24 HRS



TRAFFICABLE

±10 YRS



LIFESPAN

## APPLICATION METHODS



**TOUCH DRY**



± 3 hours

**FULL CURE**




3 - 5 days

**OVER-COATING**



3 - 12hours

**AVERAGE COVERAGE\***



± 1m<sup>2</sup> / per litre

\***COVERAGE:** The recommended coverage is 1.0 litre per square meter applied in two coats, each with a WFT (Wet Film Thickness) of 500 microns. Each coat will dry to a DFT (Dry Film Thickness) of 275 microns.

Manufactured by NUI – Member of the RIGIFoam Group

[www.ultraseal.co.za](http://www.ultraseal.co.za)  
[www.rigifoam.co.za](http://www.rigifoam.co.za)  
+27 (0)11 421 0313



DISAVOWAL: The customer acknowledges and understands that after delivery, the goods will have left the control of Rigifoam (Pty) Ltd, and that the customer will be responsible for the unpacking of and connection/installation of the goods. The customer acknowledges that it is his/her further responsibility to ensure that a fully qualified and competent person is used to install the goods to ensure their effective operation. Failure by the customer to ensure the installation of the goods, according to the written instructions of the manufacturer and/or supplier, by a fully qualified and competent person, may result in the failure of the goods, injury, loss or damages to the customer. Accordingly, and in this event, Rigifoam (Pty) Ltd accepts no responsibility for any loss or damages that might arise by reason of death or personal injury to any person engaged in the installation or use of the goods thereafter, subject to the provisions of the Consumer Protection Act 68 of 2008.